




CellAntenna

SOLVING CELLULAR COMMUNICATION PROBLEMS WORLDWIDE

CAE50-GEMINI-2 DUAL BAND REPEATER SYSTEM

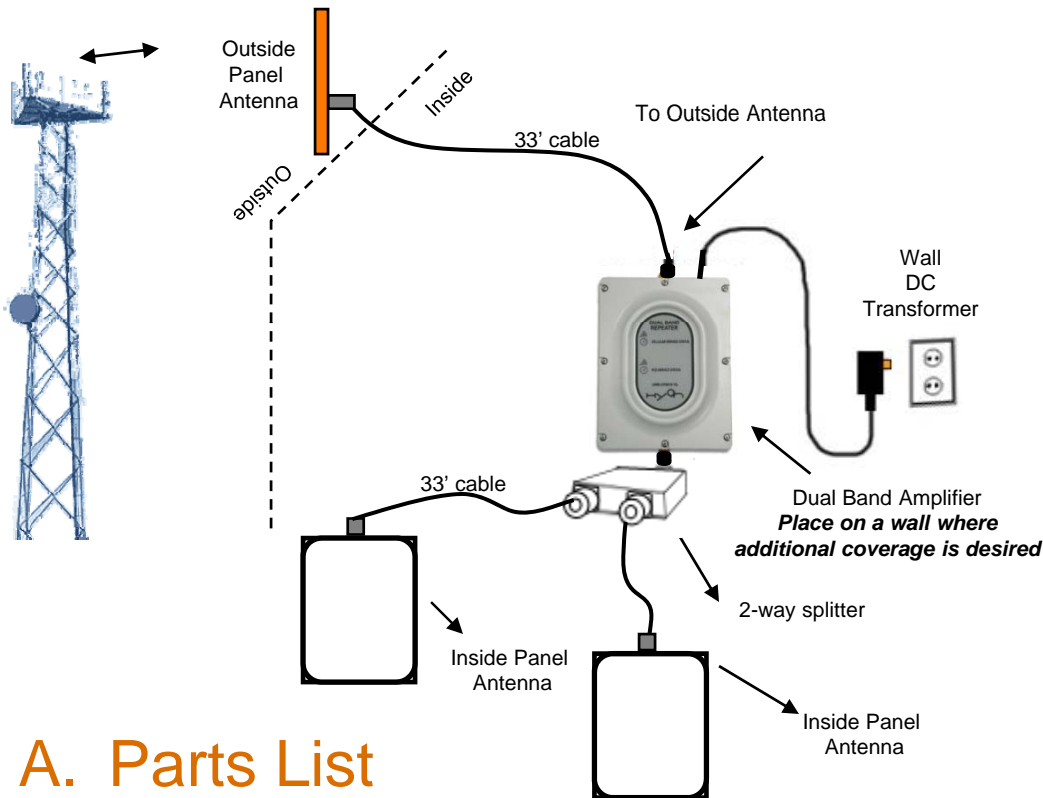

A. Parts List

- (1) FCC licensed 50dB Dual Band In-Building Amplifier with wall pack DC power supply
- (2) Indoor panel antenna
- (1) CA-P2004 panel directional rooftop donor antenna
- (2) 33 feet of low loss cable (N male –SMA male connectors)
- (1) 2-way splitter
- Installation Instructions

B. Instruction

- 1) Mount the outdoor directional panel antenna on the rooftop
- 2) Mount amplifier indoors on a wall where coverage is needed, near a 120V outlet **IMPORTANT !! DO NOT POWER ON YET!**
- 3) Run 33' cable from rooftop antenna to amplifier (connect to the **OUTSIDE ANTENNA** side of amplifier)
- 4) Connect one of the indoor panel antennas to port #1 on the splitter that is already attached to the amplifier (**INSIDE ANTENNA** side).
- 5) Connect a 33' cable to port #2 of the splitter.
- 6) Connect the other panel antenna to the other end of the 33' cable.
- 7) Plug in power supply to 120V outlet and DC connector into DC jack of amplifier, thus supplying power to amplifier
- 8) Installation is completed

CellAntenna.com